

AirGuard NQWS Series

RF surge protection for coaxial applications



- Multi application
- Low passive intermodulation (PIM)
- Weatherproof
- Up to 100kA of surge current capacity
- No discrete components to fail
- Models from 420MHz to 6GHz
- Nickel plated for corrosion resistance



The **NQWS Series (Narrowband Quarterwave Tubeless Stub)** of surge protection devices prevent surges and transient overvoltages. The NQWS Series uses an innovative "tubeless" design to achieve the superior performance characteristics of a conventional quarterwave stub. This compact unit has a high transient current capability with extremely low Passive Intermodulation (PIM).

Typical applications for the NQWS Series include the protection of radio telemetry systems, mobile communications base stations and where high induced voltages may be present.

Receivers and transmitters are particularly vulnerable to damage from the effects of lightning. Their remote locations (height above ground) and physical construction make them vulnerable to lightning activity. The use of semiconductors and integrated circuits in transmitters and receivers has

rendered them particularly prone to damage from these disturbances.

Excellent performance levels are achieved using a tuned cavity and no discrete components to offer extremely high surge current capability in a rugged, economic, compact enclosure to produce superior surge suppression.

The AirGuard Series provides a wide range of connector types including BNC, TNC, N-type, SMA and UHF to suit all application requirements. In addition, bulkhead mounting options are provided where insertion into a panel is preferable. The GT and RGT Series are available with a wide choice of voltages: 90V, 145V, 230V, 350V, 470V, 600V, 800V or 1,000V.

Complete facility/site protection can be achieved by using Atlantic Scientific's wide range of AC

and DC power surge protection devices to prevent surges entering equipment via their power supply. The ZoneMaster range of protectors combine a high level of protection and when used in conjunction with the ZoneBarrier data protection modules, provide the highest level of site protection available.

RF Coax Protection

Specification

[all figures typical at 77°F unless otherwise stated]

Maximum discharge current
60 - 100kA (8/20μs)

Maximum power rating (VSWR)
1.15:1

Frequency Range
410MHz to 6GHz

Peak Pulse Current (8/20μs)
60kA - 120kA

Impedance
50 Ω

RF Power
.5kW average
5kW peak

Typical let-through voltage
10V pk / 10μJ @ 20kA 8/20μs

Return loss
-26.4dB

Passive intermod
-150dBc PIM

Weight
0.3lb / 140g

Environmental
IP67
-40°C - +90°C

Model	Mounting Connectors	Second Connector	VSWR	Insertion Loss (dB)	Impedance (Ω)	Surge Current
51033*	N Bulkhead Female	N Female	1.1:1 to 1.15:1	0.1 to 0.15	50	60kA
51034*	N Bulkhead Female	N Male	1.1:1 to 1.15:1	0.1 to 0.15	50	60kA
51035*	7/16 Bulkhead Female	7/16 Female	1.1:1 to 1.15:1	0.1 to 0.15	50	100kA
51036*	7/16 Bulkhead Female	7/16 Male	1.1:1 to 1.15:1	0.1 to 0.15	50	100kA

250 piece minimum for 51035*, 51036*, 51037 & 51038

Note: Select frequency code from table below. The 51035 & 51036 are available only in frequency codes A, B, C, F & I.

Bandwidth Frequency

Code	A	B	C	E	F	G	I	H
Frequency	.411-494	.82-.96	1.7-2.0	2.2-2.6	3.0-3.6	5.15-5.88	.82-2.2	2.4-6.0
Loss	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.15
VSWR	1.1	1.1	1.1	1.1	1.1	1.1	1.15	1.15

Model	Mounting Connectors	Second Connector	Band GHz	VSWR	Insertion Loss (dB)	Impedance (Ω)	Surge Current
51037	7/16 Bulkhead Female	7/16 Male	.82 - 2.2	1.1:1 to 1.15:1	0.1 to 0.15	50	100kA
51038	7/16 Bulkhead Female	7/16 Female	.82 - 2.2	1.1:1 to 1.15:1	0.1 to 0.15	50	100kA
51039	N Bulkhead Female	N Female	.82 - 2.2	1.1:1 to 1.15:1	0.1 to 0.15	50	60kA
51040	N Bulkhead Female	N Male	.82 - 2.2	1.1:1 to 1.15:1	0.1 to 0.15	50	60kA


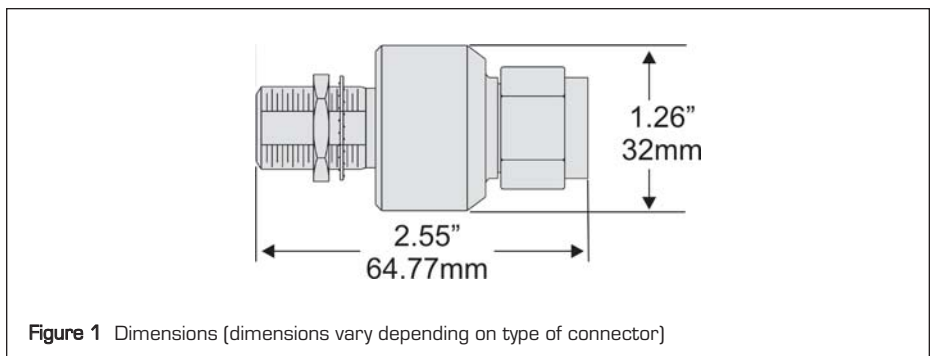


Figure 1 Dimensions [dimensions vary depending on type of connector]

Brackets

Model	Connectors	Diameter
51074	7/16 DIN	1.146" (2.91cm)
51075	N	0.630" (1.6cm)

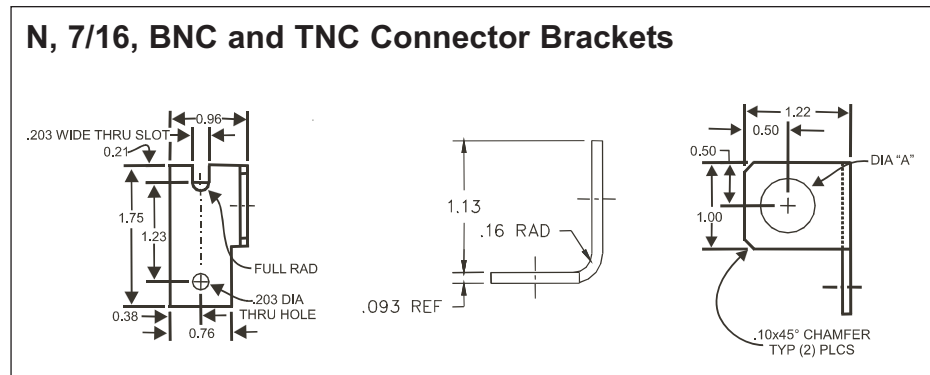

Note: In accordance with our policy of continuous improvement, we reserve the right to change the product's specification without notice.

Atlantic Scientific Corporation
4300 Fortune Place, Suite A W. Melbourne, FL 32904 USA
T: +1 544 4737, +1 321 725 8000 F: +1 321 727 0736
E-mail: sales@atlanticsscific.com W: www.atlanticsscific.com

A member of the MTL Instruments Group plc