



A part of **COOPER** Crouse-Hinds

# Surge Protection

Engineering Specification Submittal

**Model:** ZoneMaster 200      **Order Code:** 11300X  
(with Extended Range Filter)

*Applicable Standards*

NEMA LSI - 1992	ANSI/IEEE C62.41
UL 1449 3rd Edition	ANSI/IEEE C62.45
UL 1283	

*General Electrical*

SPD Category	Service Entrance
Nominal service voltage	120/240V
Maximum continuous operating voltage	150V
Remote indication	Isolated, NO/NC contacts 60W DC, 120VA AC, 3A rated
Module diagnostics	Protection present Green LED
	Fault warning Red LED
	High voltage neutral to ground Green & Red LED

*Maximum Surge Current*


Maximum Surge Current in per Protection Mode				Maximum Surge Current Per Phase
L-N	L-G	L-L	N-G	
200,000A	----	200,000A	200,000A	200,000A

*Clamping Voltage*

ANSI/IEEE C62.41 ANSI/IEEE C62.45 Clamping Voltage	B3 (500A) Ringwave	B3 (3,000A)	C3 (10,000A)
	293V	350V	446V

*EMI - RFI Noise Reduction*

75dB Max  
100kHz to 100MHz

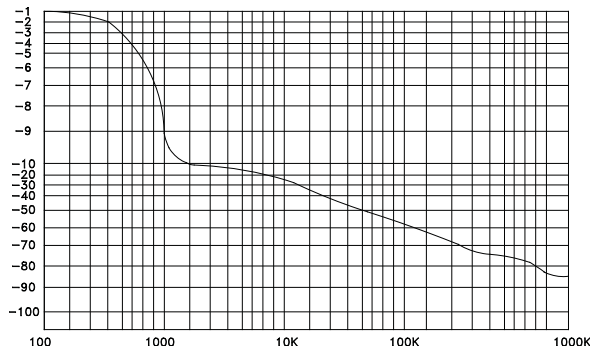

*Agency Approvals*

UL 1449 3rd Edition  
CE  
C-UL-US

Independent UL 1449 Suppressed Voltage Ratings				UL 3rd Edition VPR			
L-N	L-G	L-L	N-G	L-N	L-G	L-L	N-G
400V	---	700V	400V	600V	---	900V	600V

## Physical and General Data:

Enclosure:	NEMA 1, 2, 3, 3S, 4, 4X, 12, and 13. Transparent cover for maximum visibility and safety.
Dimensions:	11.69" x 8.4" x 4.83" (297mm x 213.36mm x 123mm)
Weight:	Approx. 7 lbs.
Operating Environment:	-40°C to 85°C, 95% relative humidity (non-condensing)
Construction:	Ultra low impedance assembly. Modules are bolted to a corrosion resistant, tin plated copper bus bar. No plug-in modules in the surge path.
Terminal Lugs:	#2 AWG max wire size
Mounting:	0.31" diameter holes (10.75" x 8.00") (enclosure can be easily drilled for cable access)
Module Replacement:	Remove two bolts, unplug remote indication connector and remove module. Estimated replacement time 2 minutes.
Module Dimensions:	1.25" x 5.3" x 2.5" (3.2cm x 13.5cm x 6.4cm)

