



# Surge Protection

## Engineering Specification Submittal

**Model:** ZoneMaster 200 All Mode

**Order Code:** 17200X

**Applicable Standards**

NEMA LSI - 1992  
 UL 1449 3rd Edition  
 UL 1283

ANSI/IEEE C62.41  
 ANSI/IEEE C62.45

**General Electrical**

SPD Category  
 Nominal service voltage  
 Maximum continuous operating voltage  
 Remote indication

Service Entrance  
 120/240V  
 150V  
 Isolated, NO/NC contacts, 60W DC,  
 120VA AC, 3A rated

Module diagnostics	Protection present	Green LED
	Fault warning	Red LED
	High voltage neutral to ground	Green & Red LED

**Maximum Surge Current**


Maximum Surge Current in per Protection Mode				Maximum Surge Current
L-N	L-G	L-L	N-G	Per Phase
100,00A	100,000A	200,000A	200,000A	200,000A

**Clamping Voltage**

ANSI/IEEE C62.41 ANSI/IEEE C62.45 Clamping Voltage	B (500A) Ringwave	B (3,000A)	C High (10,000A)
	328V	416V	528V

**EMI - RFI Noise Reduction**

75dB Max  
 100kHz to 100MHz

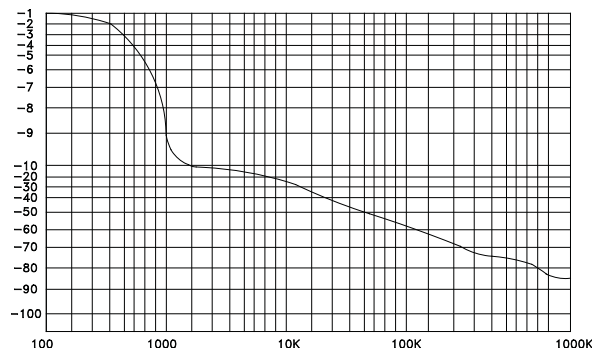

**Agency Approvals**

UL 1449 3rd Edition  
 UL 1283  
 CE  
 C-UL-US

Independent UL 1449 Suppressed Voltage Ratings				UL 1449 Listed 3rd Edition VPR			
L-N	L-G	L-L	N-G	L-N	L-G	L-L	N-G
400V	400V	700V	400V	800V	800V	1200V	900V

**Physical and General Data:**

<b>Enclosure:</b>	NEMA 1, 2, 3, 3S, 4, 4X, 12 & 13 (IP 66)
<b>Dimensions:</b>	12.4" x 13.7" x 7.3" (315mm x 347.7mm x 185mm)
<b>Weight:</b>	Approx. 10.5 lbs. (4.8kg)
<b>Operating Environment:</b>	-40°C to 85°C, 95% relative humidity (non-condensing)
<b>Construction:</b>	Ultra low impedance assembly. Modules are bolted to a corrosion resistant, tin plated copper bus bar. No plug-in modules in the surge path.
<b>Terminal Lugs:</b>	#2 AWG max wire size
<b>Mounting:</b>	0.31" diameter holes (16.75" x 12.00") (enclosure can be easily drilled for cable access)
<b>Module Replacement:</b>	Remove two bolts, unplug remote indication connector and remove module. Estimated replacement time 2 minutes.
<b>Module Dimensions:</b>	1.25" x 5.3" x 2.5" (3.2cm x 13.5cm x 6.4cm)

