



Surge Protection

Engineering Specification Submittal

Model: ZoneMaster PRO Order Code: 15300

Applicable Standards

NEMA LSI - 1992
 UL 1449 3rd Edition
 UL 1283

ANSI/IEEE C62.41
 ANSI/IEEE C62.45

General Electrical

SPD Category Service Entrance
 Nominal service voltage 120/240V
 Maximum continuous operating voltage 150V
 Remote indication Isolated, NO/NC contacts, 60W DC, 120VA AC, 3A rated

Module diagnostics Protection present Green LED
 Fault warning Red LED
 High voltage neutral to ground Green & Red LED
 On board monitoring Surge counter, fault monitor, audible alarm

Optional Standard Fused Disconnect 600VAC
 200,000A RMS Symmetrical Rating
 200,000 AIC Fusing

Maximum Surge Current


Maximum Surge Current in per Protection Mode				Maximum Surge Current
L-N	L-G	L-L	N-G	Per Phase
200,00A	200,000A	400,000A	200,000A	400,000A

Clamping Voltage

ANSI/IEEE C62.41 ANSI/IEEE C62.45 Clamping Voltage	B (3,000A)	C High (10,000A)
	416V	528V

EMI - RFI Noise Reduction

75dB Max
 100kHz to 100MHz

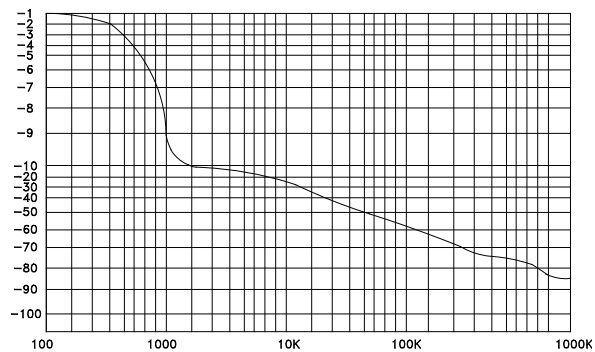

Agency Approvals

UL 1449 3rd Edition
 UL 1283
 C-UL-US

Independent UL 1449 Suppressed Voltage Ratings				UL 1449 Listed 3rd Edition VPR			
L-N	L-G	L-L	N-G	L-N	L-G	L-L	N-G
400V	400V	700V	400V	800V	800V	1200V	800V

Physical and General Data:

Enclosure:	NEMA 1 or NEMA 3R/4
Dimensions: (flush mount)	14" x 17.5" x 5.47" (36cm x 44.5cm x 13.9cm) 16" x 17.5" x 5.34" (41cm x 44.5cm x 13.7cm)
Weight:	Approx. 24.4 lbs. (11.2kg)
Operating Environment:	-40°C to 85°C, 95% relative humidity (non-condensing)
Construction:	Ultra low impedance assembly. Modules are bolted to a corrosion resistant, tin plated copper bus bar. No plug-in modules in the surge path.
Terminal Lugs:	#2 AWG max wire size
Mounting:	0.31" diameter holes (16.75" x 12.00") (enclosure can be easily drilled for cable access)
Module Replacement:	Remove two bolts, unplug remote indication connector and remove module. Estimated replacement time 2 minutes.
Module Dimensions:	1.25" x 5.3" x 2.5" (3.2cm x 13.5cm x 6.4cm)

