



# Surge Protection

Engineering Specification Submittal

**Model:** ZoneMaster PRO **Order Code:** 15206

**Applicable Standards**

NEMA LSI - 1992  
 UL 1449 3rd Edition  
 UL 1283

ANSI/IEEE C62.41  
 ANSI/IEEE C62.45

**General Electrical**

SPD Category: Service Entrance  
 Nominal service voltage: 480V Delta  
 Maximum continuous operating voltage: 550V  
 Remote indication: Isolated, NO/NC contacts, 60W DC, 120VA AC, 3A rated

Module diagnostics:  
 Protection present: Green LED  
 Fault warning: Red LED  
 High voltage neutral to ground: Green & Red LED  
 On board monitoring: Surge counter, fault monitor, audible alarm

Optional Fused Disconnect: 600VAC  
 200,000A RMS Symmetrical Rating  
 200,000 AIC Fusing

**Maximum Surge Current**


Maximum Surge Current in per Protection Mode				Maximum Surge Current Per Phase
L-N	L-G	L-L	N-G	
—	340,000A	340,000A	—	340,000A

**Clamping Voltage**

ANSI/IEEE C62.41 ANSI/IEEE C62.45 Clamping Voltage	B (3,000A)	C High (10,000A)
		1552V

**EMI - RFI Noise Reduction**

75dB Max  
 100kHz to 100MHz

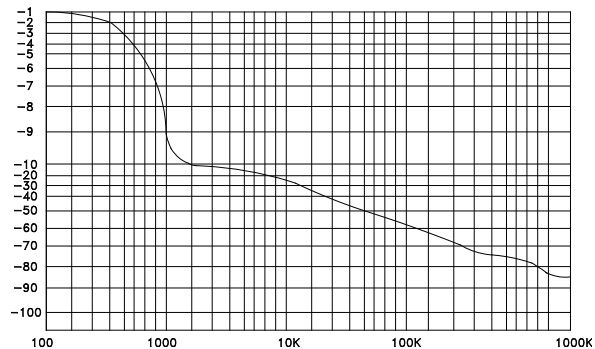

**Agency Approvals**

UL 1449 3rd Edition  
 UL 1283  
 C-UL-US

Independent UL 1449 Suppressed Voltage Ratings				UL 1449 Listed 3rd Edition VPR			
L-N	L-G	L-L	N-G	L-N	L-G	L-L	N-G
800V	800V	1800V	400V	—	2000V	2000V	—

## Physical and General Data:

<b>Enclosure:</b>	NEMA 1 or NEMA 3R/4
<b>Dimensions:</b> (flush mount)	14" x 17.5" x 5.47" (36cm x 44.5cm x 13.9cm) 16" x 17.5" x 5.34" (41cm x 44.5cm x 13.7cm)
<b>Weight:</b>	Approx. 24.4 lbs. (11.2kg)
<b>Operating Environment:</b>	-40°C to 85°C, 95% relative humidity (non-condensing)
<b>Construction:</b>	Ultra low impedance assembly. Modules are bolted to a corrosion resistant, tin plated copper bus bar. No plug-in modules in the surge path.
<b>Terminal Lugs:</b>	#2 AWG max wire size
<b>Mounting:</b>	0.31" diameter holes (16.75" x 12.00") (enclosure can be easily drilled for cable access)
<b>Module Replacement:</b>	Remove two bolts, unplug remote indication connector and remove module. Estimated replacement time 2 minutes.
<b>Module Dimensions:</b>	1.25" x 5.3" x 2.5" (3.2cm x 13.5cm x 6.4cm)

